

## **ADDENDUM #1**

### **Mast Road Culvert Replacement**

### **December 22, 2021**

#### **Questions:**

1. Is there additional milling beyond the limit of work shown on the plans? Or is item #1 intended for removing the pavement inside the limits by means of excavator, not milling?  
**Answer: No pavement milling is planned. Pavement removal shall be by stripping the asphalt with an excavator to the limits shown on the plans.**
2. Is the intention to leave all existing trees in place? If it is deemed a tree needs to be removed, will this be paid for via change order?

**Answer: There are two trees identified at the downstream end of the culvert that will need to be removed. These two trees should be considered incidental to the culvert bid item. Any other trees will need to be approved during construction and will be paid via change order. See image below.**



3. Is utilizing Brook St & Blackstrap Rd the intended detour for the 1 week of allowable road closure?


**Answer: Most likely yes, and Babbidge Road.**

4. Is re-striping the road required since there will be an overlay soon after project completion?

**Answer: No restriping is required. The Town will put TOMS down until the Mast Road is paved.**

#### **Clarifications:**

1. The quantities for items #7 and #8 were swapped in the original bid form. Please use the revised bid form attached to this addendum. An addendum acknowledgement statement was also added to the bid form.

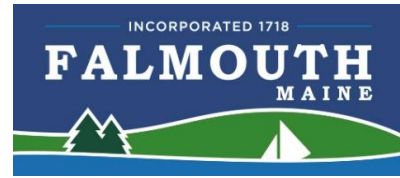

**Bid Form (Mast Road Culvert Replacement)**

**REVISED**

Item #	Item (MEDOT specification where applicable)	Estimated Quantity	Unit	Unit Price (\$)	Total Price (\$)
1	Remove Pavement Surface (202.127)	156	SY		
2	Remove Existing Culvert Pipes (202.19)	1	LS		
3	12' x 5' Precast Concrete Box Culvert (534.71)	1	LS		
4	Void-Filled Riprap (D50=12")	90	CY		
5	Riprap (D50=12")	30	CY		
6	Common Borrow (703.18)	100	CY		
7	Aggregate Base (304.14)	20	CY		
8	Aggregate Subbase (304.10)	60	CY		
9	F&I 12.5mm HMA Surface Mix (403.208)	14	Tons		
10	F&I 19.0mm HMA Base Mix (403.207)	18	Tons		
11	Remove and Reset Guardrail	100	LF		
12	Loam and Seed	200	SY		
13	Temp. Soil and Water Pollution Control (656.75)	1	LS		
14	Traffic Control	1	LS		
15	Mobilization (659.10)	1	LS		

Total Bid Price (numerals): \_\_\_\_\_

Total Bid Price (written): \_\_\_\_\_

**The undersigned acknowledges the receipt of Addenda numbered \_\_\_\_\_**


Bid Submittal: Sealed bids shall be labeled "RFP – Mast Road Culvert Replacement, Attn: Justin Early and addressed to Town of Falmouth, Public Works Department, 101 Woods Road, Falmouth, ME 04105.

Sealed bids shall be submitted by **Thursday, January 13<sup>th</sup>, 2022 at 11:00 AM** Eastern Standard Time.

There will not be a pre-bid meeting for this project.

Bid results will be distributed electronically shortly following the bid submittal date.

Town of Falmouth  
Public Works Department  
101 Woods Road  
Falmouth, ME 04105  
207-781-3919

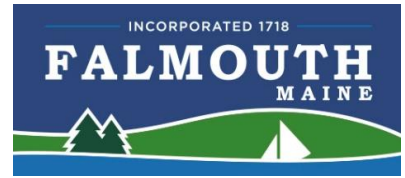

A bid bond is not required for this project.

All pre-bid correspondence shall be submitted to Justin Early, Town Engineer, at [jeary@falmouthme.org](mailto:jeary@falmouthme.org) or at 207-781-3919.

Questions regarding this bid/proposal shall be accepted until 5:00 PM, Monday, January 10<sup>th</sup>, 2022.

I have read and understand the content of this Request for Proposal (RFP):

Contractor: \_\_\_\_\_

Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Title: \_\_\_\_\_

Email: \_\_\_\_\_ Phone: \_\_\_\_\_